

WHITE

tala®

LINEAR TRIPLE PENDANT

The Brass Linear Triple Pendant by Tala combines three signature Brass pendants with the sleek and sturdy linear canopy. Designed to display a trio of decorative bulbs in a uniform row, this is ideal for illuminating a kitchen island, dining table or hallway. The white powder-coated steel frame merges seamlessly with your ceiling, while offering a hardy, secure base from which to hang your lights.

FIXTURE

Type: Linear Plate

Materials:

White Powder Coated Steel

Luminaire Class: I

Warranty: 3 years

PENDANT

Materials: Brass

Lampholder: E27

Luminaire Class: II

Working temperature: -5°C to 40°C

Warranty: 1 years

Input Voltage: 220-240V

Max Wattage: 60W



DIMENSIONS:

LINEAR PLATE:

800mm x 130mm x 25mm
(Width x Length)

PENDANT:

40mm x 79mm
(Width x Length)

CABLE LENGTH:

3000 mm
(Length)

SKU CODE: LP-WHT-BP-01-EU

EAN CODE: 5060400159888

IP20



SPHERE IV

SKU: SPHR-G150-8W-2000/2800K-E27-MP

tala®

8 WATT | 680 LUMENS | 2000K TO 2800K

DIM TO WARM
TECHNOLOGY

Decorative, dim to warm LED lightbulb. This lamp uses 8 Watts of power and achieves 680 Lumens at a CRI of 95. It has an IP54 rating.



LAMP

Shape: G150
Materials: Borosilicate Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E27
Weight: 180g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 220-240V, 50/60Hz



BULB DIMENSIONS

150 x 190 mm
(Width x Length)


PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	680lm
Flicker	<5%
Lumens per circuit watt (LM/W)	85lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

DIMMING

Dimmable: Yes
Dimming type: Leading or trailing edge dimmer
Recommended EU Dimmer: Varilight - V-pro
A full list of compatible dimmers is available on our website:
www.tala.co.uk/recommended-dimmers/

POLAR DIAGRAM

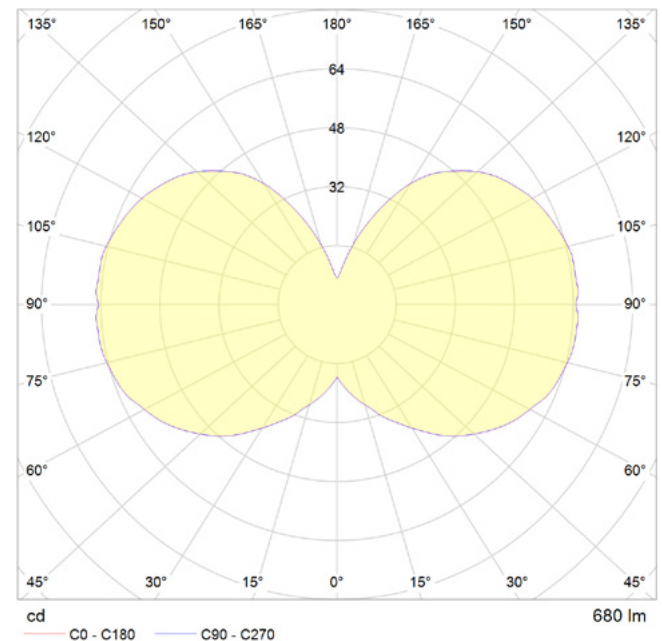

IES/LDT FILE

Available upon request.

EAN UK: 5060400152889

IP54

