

WHITE

tala®

LINEAR TRIPLE PENDANT (US)

The Brass Linear Triple Pendant by Tala combines three signature Brass pendants with the sleek and sturdy linear canopy. Designed to display a trio of decorative bulbs in a uniform row, this is ideal for illuminating a kitchen island, dining table or hallway. The white powder-coated steel frame merges seamlessly with your ceiling, while offering a hardy, secure base from which to hang your lights.

FIXTURE

Type: Small Canopy

Materials:

White Powder Coated Steel

Luminaire Class: I

Warranty: 3 years

PENDANT

Materials: Brass

Lampholder: E26

Luminaire Class: II

Working temperature: -5°C to 40°C

Warranty: 1 years

Input Voltage: 110-120V

Max Wattage: 60W



DIMENSIONS:

LINEAR PLATE:

31.5 x 5.1 x 1.0in
(Width x Length)

PENDANT:

1.6 x 3.1in
(Width x Length)

CABLE LENGTH:

118.1in
(Length)

SKU CODE: LP-WHT-BP-01-US

EAN CODE: 5060400159895

IP20



SPHERE IV

SKU: SPHR-G150-8W-2000/2800K-E26-MP-120V

tala®

8 WATT | 680 LUMENS | 2000K TO 2800K

Decorative, dim to warm LED lightbulb. This lamp uses 8 Watts of power and achieves 680 Lumens at a CRI of 95. It has an IP54 rating.

DIM TO WARM
TECHNOLOGY



LAMP

Shape: G47 (USA)
Materials: Borosilicate Glass and Brass Cap
Finish: Matte White
Beam angle: 360°
Base: E26
Weight: 180 g
Working temperature: -5°C to 40°C
Warm up time: Instant
Warranty: 3 years
Input Voltage: 110-120V | 50/60Hz




BULB DIMENSIONS

5.9 x 7.5 in
(Width x Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	680lm
Flicker	<5%
Lumens per circuit watt (LM/W)	85lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2000K - 2800K
Power factor	0.9

POLAR DIAGRAM

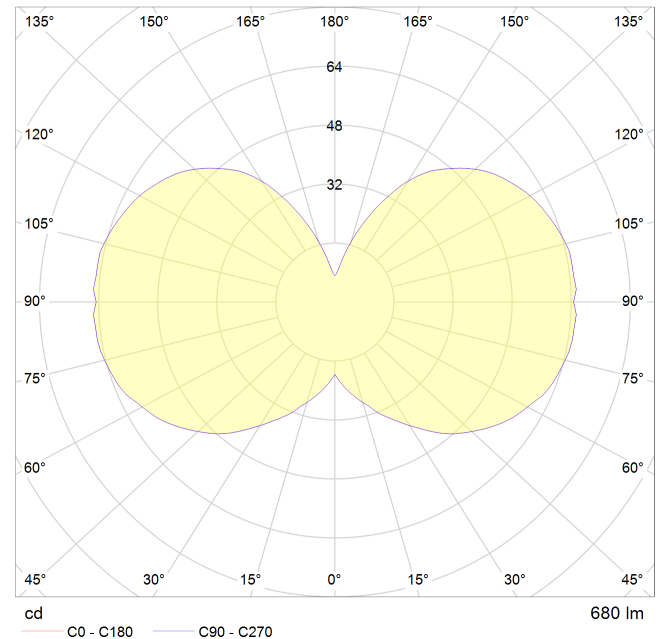

DIMMING

Dimmable: Yes
Dimming type: Leading edge or Trailing edge
Recommended Dimmer: Lutron DVELV-300P
A full list of compatible dimmers is available on our website:
us.tala.co.uk/recommended-dimmers/

IES/LDT FILE

Available upon request.

EAN US: 5060400152872



us.tala.co.uk | hello@tala.co.uk | +1 (929) 294-9574

Specification subject to change without notice. Refer to our website for the most recent product documentation.